
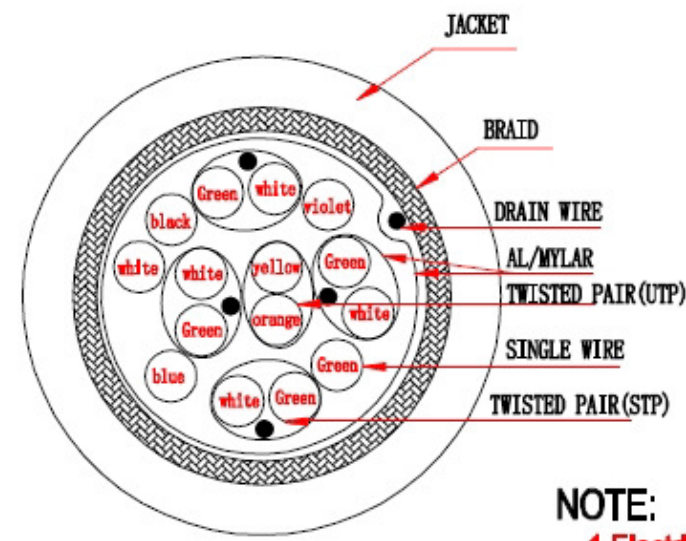


REVISIONS

REV	DATE	DESCRIPTIONS	APPRO. BY

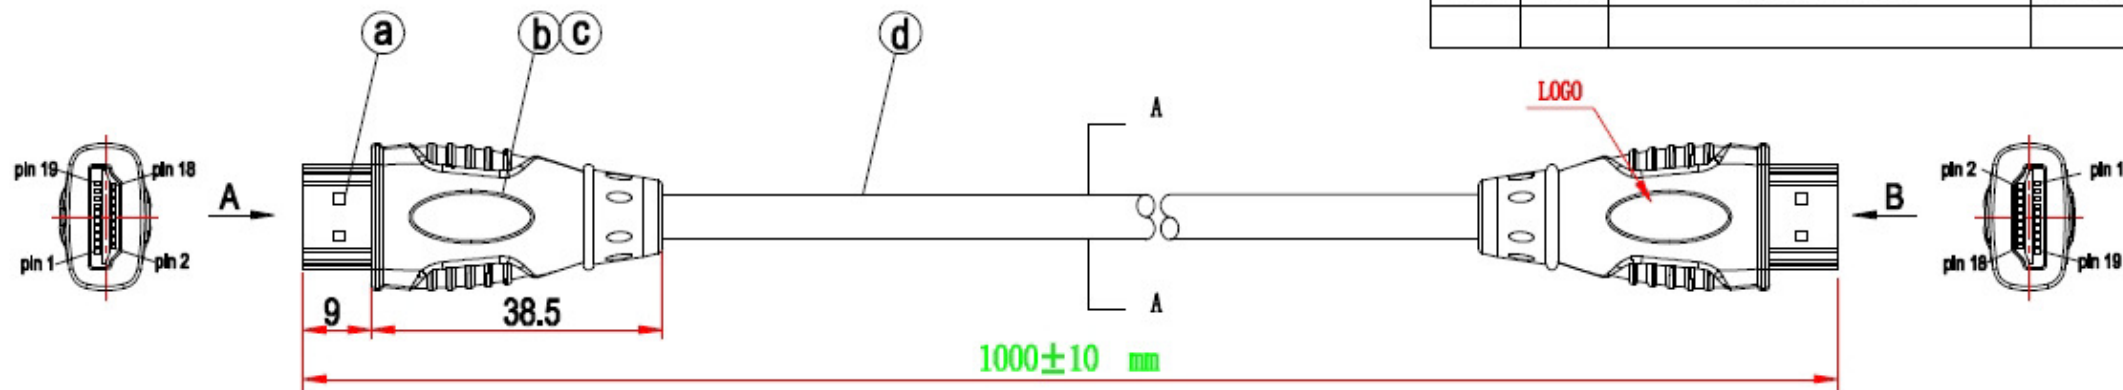

CONNECTION

CN1	CN2	CN1	CN2
1 GREEN	1	13 BLACK	13
3 WHITE	3	14 VIOLET	14
2 DRAIN	2	15 YELLOW	15
4 GREEN	4	16 ORANGE	16
6 WHITE	6	17 WHITE	17
5 DRAIN	5	18 GREEN	18
7 GREEN	7	19 BLUE	19
9 WHITE	9	SHELL DRAIN	SHELL
8 DRAIN	8		
10 GREEN	10		
12 WHITE	12		
11 DRAIN	11		

NOTE:

1. **Electrical TEST**
 - (1). 100% open short & miss wire test;
 - (2). Insulation resistance: DC 300V 3Mohm Min;
 - (3). Contact resistance: 3 ohm Max;
 - (4). Dielectric strength: 100V AC/Minute, 1mA.
2. Rohs compliant.

SECTION: A-A

d	UL20276 [(28AWG*1Pair+D+FAM)*4Pair+(28AWG*1Pair)+(28AWG*5C)]+AM+B HDMI CABLE, OD=7.3mm, JACKET BLACK	1000±10 mm
c	INNER MOLD HOOD LD-PE	2 Pcs
b	OUTER MOLD HOOD PVC BLACK	2 Pcs
a	HDMI 19 MALE GOLD FLASH ON CONTACT, SHELL GOLD PLATED	2 Set
NO.	DESCRIPTION	Q'TY

CUSTOMER'S ITEM		CUSTOMER	
TITLE		HDMI CABLE	
UNIT	mm	SCALE	1:1
DRAWN BY		CHECK BY	
Kevin		David	
APPRO BY		DATE	
Larce			

AUSTRALIAN
MONITOR
INTEGRATION INTELLIGENCE

