


SPECIFICATION

Directional Characteristics ..	Uni-Direction
Frequency Response	80 ~ 12,000Hz
Impedance	600Ω
Sensitivity	-70dB ± 3dB
Weight	960g (without cord)
Cord	2.0M
Housing	Die-Cast Zinc
Finish	Coating

Typical Frequency Response

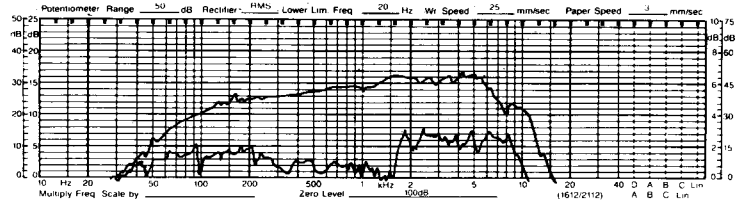

CONNECTION DETAILS

