

F600

Compact Dynamic

DESCRIPTION

A totally integrated speaker package designed for the professional in today's demanding environment. Despite its deceptively compact size, no sacrifice in output or quality has been made. The custom divider network ties together all cabinet elements optimising clarity and balance at all levels.


The network (with 18db/octave crossover slope) removes the reliance on external electronic processing units. The Bass performance is extended by a cabinet design using isolated chambers for each 15" driver.

The 2" high frequency driver is mounted on the rear of the top PAS 15" CXL 2580 which utilises a centrally mounted, constant coverage horn. Efficiency in design has ensured a near flat response from 50hz whilst retaining ultra compact dimensions relative to any competitive cabinet. The cabinet comes complete with hard wearing carpet finish, and includes steel protective corners. The plywood cabinet is braced, and rebated with a heavy duty steel grille, steel bar handles and wheels for handling with ease.



FEATURES

- ◆ NEW 2" 80W compression driver.
- ◆ NEW 400W 4" voice coil PAS coaxial.
- ◆ NEW high power network design.
- ◆ STILL an ultra compact speaker cabinet. (a pair in a station wagon)

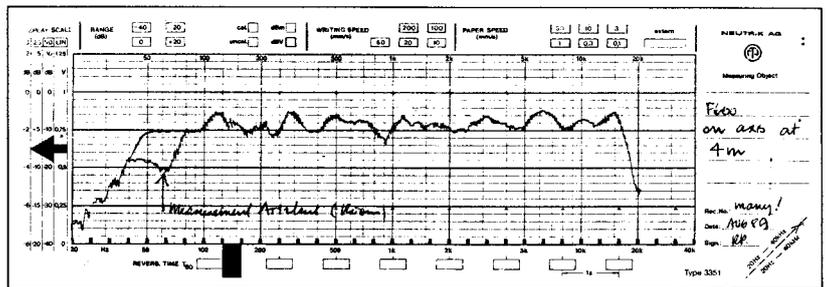

SPECIFICATIONS

Continuous power handling, unclipped signal – 400WATTS
Short term power handling, unclipped signal – 800WATTS
Useable frequency response – 48Hz – 17KHz
Sensitivity – 105db at 1W/1M

Maximum short term SPL – 133db at 800WATT input
Nominal impedance – 4 OHMS
Weight – 85Kgs
Dimensions – 1050mm x 530mm x 505mm

DESIGNED FOR PERFORMANCE AND RELIABILITY, WITH ONLY THE USER IN MIND.

Australian Monitor reserves the right to change specifications at any time without notice.



Australian Monitor

53 College street, Gladesville 2111 N.S.W. Australia

Phone (02) 816-3544 International +61-2-816-3544

Fax (02) 817-4303 International +61-2-817-4303