


QF6WRC

Water Resistant Ceiling Speaker

The Australian Monitor QF6WRC is designed to provide a water resistant ceiling speaker solution that complements the QuickFit range of Australian Monitor ceiling speakers. With an IP 55 rating the QF6WRC is suitable for shower blocks, toilets, swimming pools and other wet areas.

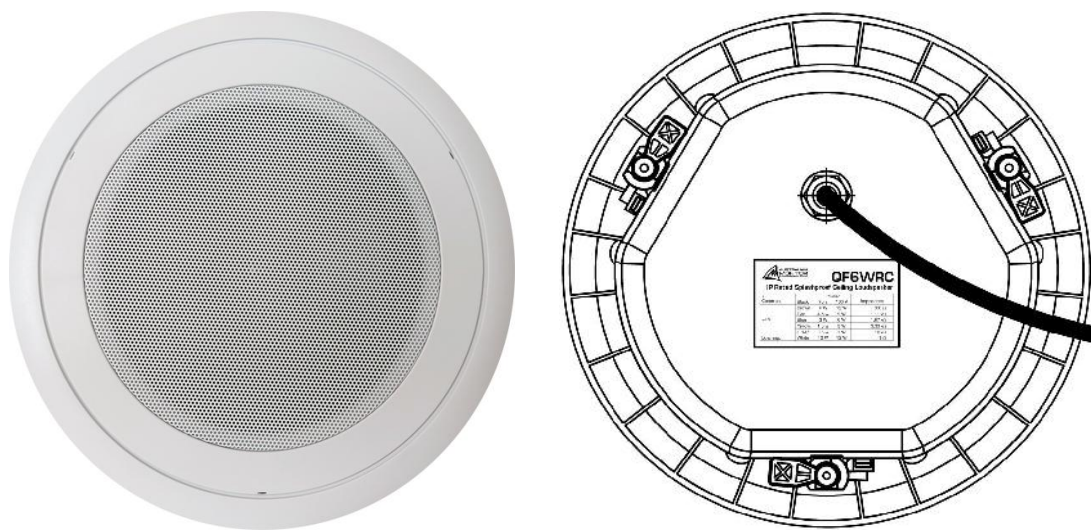


Features:

- IEC529 IP55 rated enclosure with powder coated aluminum grill
- Sealed ABS enclosure with glanded cable and cable tail
- Doped 6 Inch dual cone speaker driver
- 100V tapings 12, 9, 6, 3, 1 watts
- 70V tapings 6, 4.5, 3, 1, 0.5 watts
- Low impedance 12 watts @ 8 ohms

Specifications

Impedance (Direct)		8 Ohms
Power (Continuous, Program)		12 W, 24 W
Power Tappings	(100 V)	12, 9, 6, 3, 1 Watts
	(70 V)	6, 4.5, 3, 1.5, 0.5 Watts
Sensitivity	(1 W / 1 M) @ 1 KHz	92 dB
Calculated max SPL		103 dB, 109 dB
Dispersion	@(1 kHz, 4 kHz)	220°, 65°
Frequency Response	(-10dB)	150 Hz – 20 kHz
Frequency response	(-3 dB)	180 Hz - 18 kHz
Speaker Components	6 inch doped dual cone speaker driver	
Ingress Protection	IEC 529 IP 55	
Operating Temperature	-30°C ~ +60°C	
Net Dimensions (Diameter x Length)	238.4 x 137.5 mm (9.4" x 5.4")	

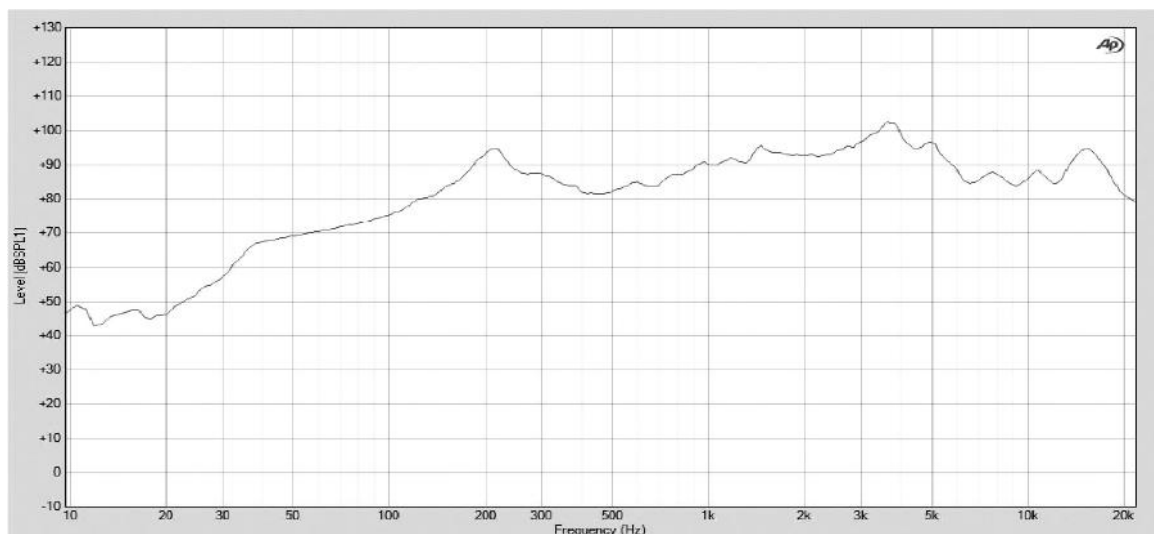

ENGINEERED BY AUSTRALIAN MONITOR
 Address: 1 Clyde St, Silverwater NSW 2128 Australia.
 Website: www.australianmonitor.com.au
 International enquiries email: customersupport@australianmonitor.com.au
 ABN 35 007 573 417



Please go to www.australianmonitor.com.au
 to download EASE® GLL files.