



AMX526




Paging Microphone

INSTALLATION AND OPERATION MANUAL

The AMX526 has been an industry standard in desk paging applications for over a decade. It offers a great sounding, rugged microphone for cost sensitive applications.

SPECIFICATIONS

TRANSDUCER TYPE	Dynamic
POLAR PATTERN	Cardioid
FREQUENCY RESPONSE	80Hz – 12Khz
SENSITIVITY	-70dB ± 3dB
ELECTRICAL IMPEDANCE	600Ω
FINISH	Matte black with silver face plate
CABLE	XLR 3 pin terminated 5 core cable 2.0 meters
AUDIO CONNECTION	Pin 2 + (Red) Pin 3 – (Black) Pin 1 Earth (Shield)
DRY CONTACT	Yellow and White conductors inside XLR connector
NET WEIGHT	980g
SHIPPING DIMENSIONS H x W x D	270 x 185 x 130 mm

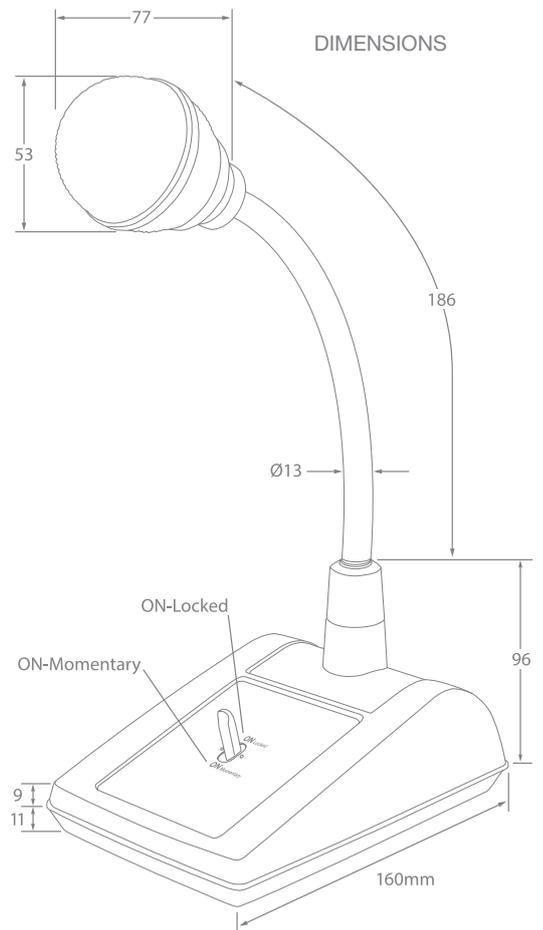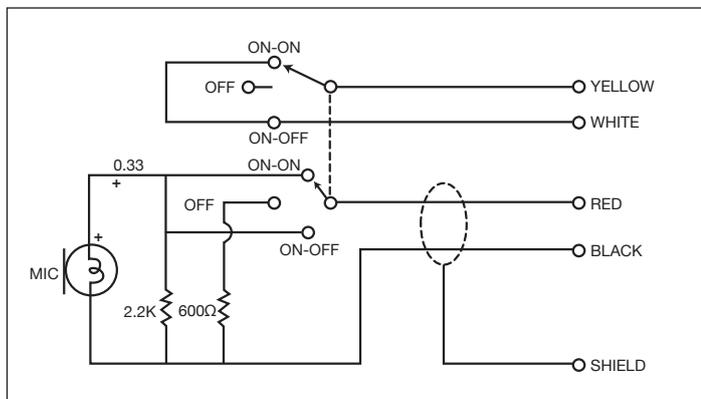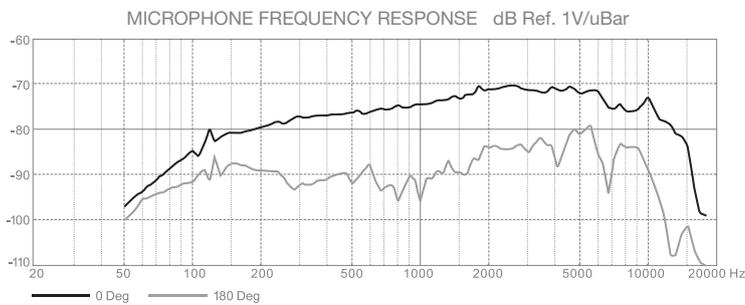

ENGINEERED BY AUSTRALIAN MONITOR
 Address: Unit 1, 2 Daydream Street, Warriewood, NSW Australia.
 Website: www.australianmonitor.com.au
 International enquiries email: international@australianmonitor.com.au
 ABN 35 007 573 417