


PICO60P



Output

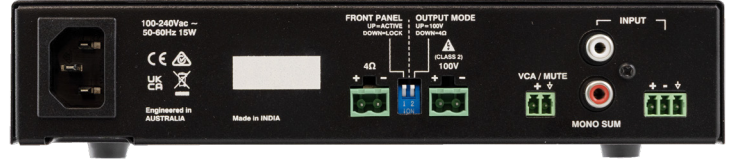

Bass/Treble



Wallpanel
volume control



GPI Muting

FEATURES

- 60W Power Amplifier
- 100V and 4Ω outputs
- Balanced Euro Block & unbalanced RCA input
- Front Panel Volume Control (Defeatable)
- Bass and Treble Control
- Optional VC-LIN Remote Volume Control
- Optional Rack and Desk mount kits


The Australian Monitor PICO60P is our half rack 60W power amplifier specifically designed for small space applications such as cafes, restaurants, unified communications and decentralised installations

The PICO60P features a high or low impedance output, bass / treble control and optional remote volume wall panel control.

SPEAKER CONFIGURATION SUGGESTIONS


BOX S

4Ω output -
two 8Ω in parallel




CEILING SPEAKERS

100V output -
four speakers
tapped at 15W

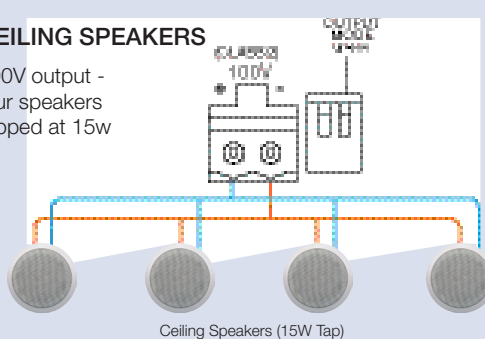

ACCESSORY PORT

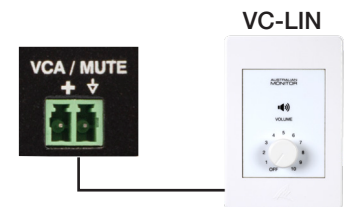

SPECIFICATIONS

OUTPUT RATING	60W
FREQUENCY RESPONSE	20Hz ~ 20kHz
4Ω	100Hz ~ 20kHz
100V	
SIGNAL TO NOISE RATIO	> 90dBA
THD + NOISE (1kHz, 4Ω/100V)	< 0.06%
DIMENSIONS (W x D x H)	217 x 265 x 44 mm
NET WEIGHT	2.2 kg

ACCESSORIES

PART NO.	TYPE	DESCRIPTION
PICO-RMK	Rack Kit	1RU Rack Mount Kit
PICO-DMK	Rack Kit	Under Desk Mounting Kit

Due to continuous improvements, all specifications are subject to change

ENGINEERED BY AUSTRALIAN MONITOR

Address: Unit 1, 2 Daydream Street, Warriewood NSW 2102 Australia

Website: www.australianmonitor.com.au

International enquiries email: international@australianmonitor.com.au

ABN 86 003 231 187

Version 1.0 May 2026