


QF DUAL CONE SERIES SPECIFICATIONS


The QuickFit dual cone series QF5CS, QF6CS, QF8CS and QF8CSB provide cost effective solutions for a myriad of commercial audio applications

DIMENSIONS (mm)

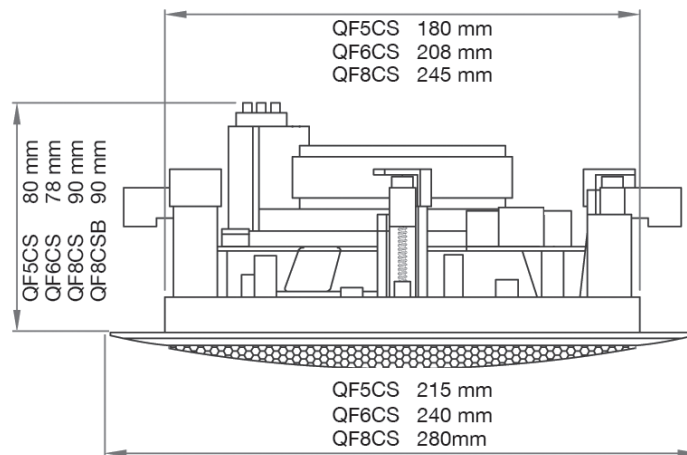

QF5CS

POLAR PLOT – SPL vs ANGLE

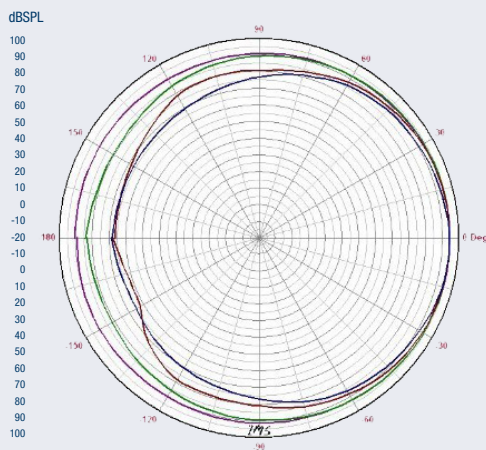


FREQUENCY RESPONSE – SPL vs FREQ



CURVE	FREQ	BW	Q	DI
—	500.00	360	1.0	0.0
—	1.00K	200	1.8	2.6
—	4.00K	113	3.2	5.0
—	8.00K	91	4.0	6.0

QF6CS

POLAR PLOT – SPL vs ANGLE

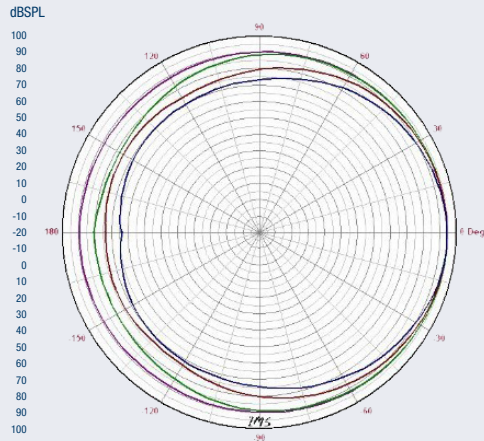


CURVE	FREQ	BW	Q	DI
	500.00	360	1.0	0.0
	1.00K	182	2.0	3.0
	4.00K	105	3.4	5.3
	8.00K	69	5.2	7.2





FREQUENCY RESPONSE – SPL vs FREQ

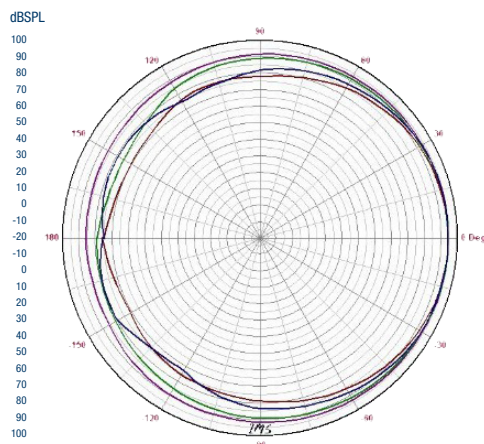


QF8CS

POLAR PLOT – SPL vs ANGLE



CURVE	FREQ	BW	Q	DI
	500.00	258	1.4	1.4
	1.00K	193	1.9	2.7
	4.00K	91	4.0	6.0
	8.00K	113	3.2	5.0

FREQUENCY RESPONSE – SPL vs FREQ

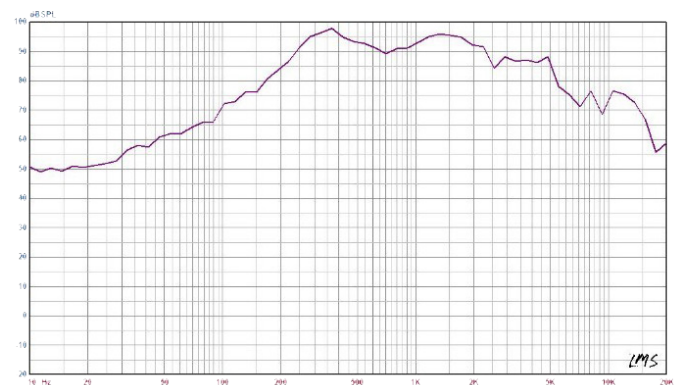

MODEL	QF5CS	QF6CS	QF8CS	QF8CSB
COAXIAL 2 WAY DRIVER	5 Inch & 25 mm	6 Inch & 25 mm	8 Inch & 25 mm	8 Inch & 25 mm
POWER TAPS @ 100V	0.75, 1.5, 3, 6 watts	1.25, 2.5, 5, 10 watts	1.87, 3.75, 7.5, 15 watts	1.87, 3.75, 7.5, 15 watts
POWER TAPS @ 70V	0.38, 0.75, 1.5, 3 watts	0.62, 1.25, 2.5, 5 watts	0.93, 1.87, 3.75, 7.5 watts	0.93, 1.87, 3.75, 7.5 watts
SENSITIVITY (1W/1M)	88dB	89dB	90dB	90dB
FREQUENCY RESPONSE	80-20 KHz	80-20 KHz	80-20 KHz	80-20 KHz
DISPERSION DEGREES @ 1KHZ	100	100	100	100
GRILLE COLOUR	White	White	White	Black
WEIGHT	0.5 Kg	0.9 Kg	1.4 Kg	1.4 Kg
DIMENSIONS	215 x 80 mm	240 x 78 mm	280 x 90 mm	280 x 90 mm
CUTOUT DIMENSION	180 mm	208 mm	245 mm	245 mm
EVAC CAPACITOR 2.2UF	Yes	Yes	Yes	Yes

ENGINEERED BY AUSTRALIAN MONITOR

Address: Unit 1, 2 Daydream Street, Warriewood NSW 2102 Australia

Website: www.australianmonitor.com.au

International enquiries email: international@australianmonitor.com.au

ABN 86 003 231 187