


# XRS10P SPECIFICATIONS


XRS10P two way active 1" compression driver and 10" woofer with biamped on board amplifier 100 watt (low) + 50 watt (high) speaker system supplied with foldback kit.

## POLAR PLOTS – Vertical directivity

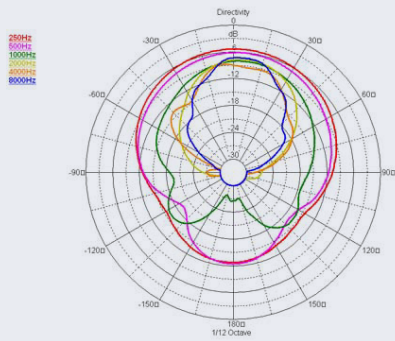


CURVE	FREQ	0dB	-6dB angle	Q	DI
—	250Hz	-5.4	176.0	2.4	3.9
—	500Hz	-6.2	179.6	2.5	4.0
—	1000Hz	-8.1	138.7	3.3	5.1
—	2000Hz	-7.8	81.6	5.4	7.4
—	4000Hz	-9.0	92.3	5.4	7.3
—	8000Hz	-7.4	63.8	7.6	8.8

## POLAR PLOTS – Horizontal directivity

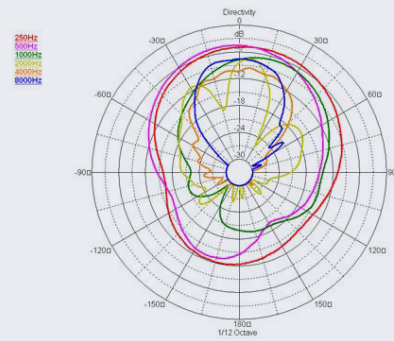

CURVE	FREQ	0dB	-6dB angle	Q	DI
—	250Hz	-5.0	148.9	2.7	4.4
—	500Hz	-4.6	117.4	3.6	5.6
—	1000Hz	-7.8	123.0	3.1	5.0
—	2000Hz	-8.4	29.4	7.1	8.5
—	4000Hz	-10.3	85.3	5.0	7.0
—	8000Hz	-7.6	62.2	7.2	8.6


## FREQUENCY RESPONSE CURVE

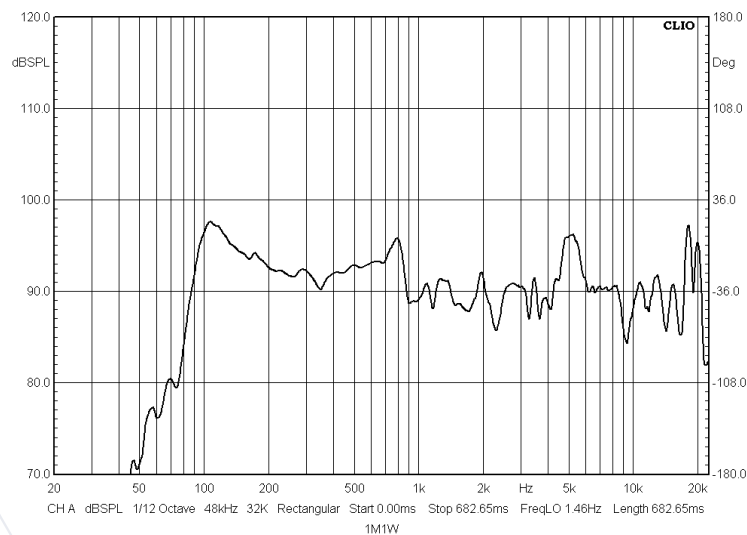



## XRS10P SPECIFICATIONS

### DIMENSIONS (mm)

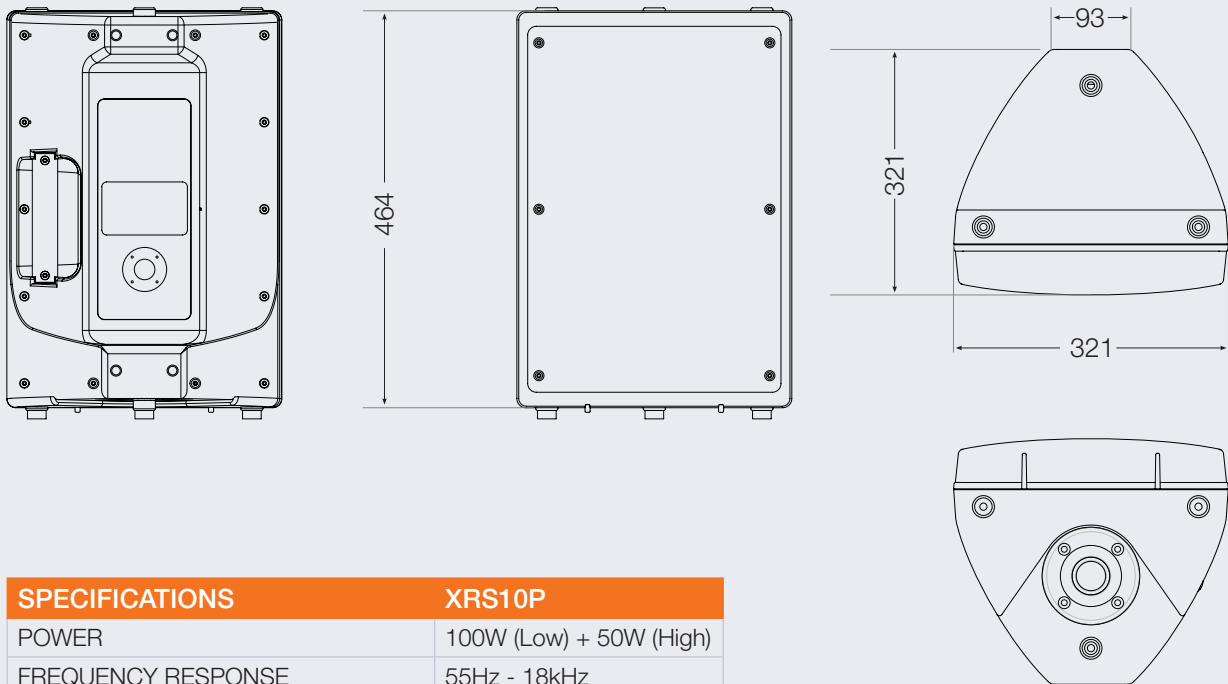

SPECIFICATIONS	XRS10P
POWER	100W (Low) + 50W (High)
FREQUENCY RESPONSE	55Hz - 18kHz
COMPRESSION DRIVER DISPERSION	90 x 90
WEIGHT	10.5kg