



It's all in the name

The Flex series of wall mount speakers are specifically designed for both indoor or outdoor commercial sound reproduction applications. Rated IP 65 with powder coated aluminium grills and stainless steel fasteners the Flex speaker series provides the ultimate flexible solution you've been waiting for. With a smart pan and tilt bracketing system, allowing both wall or celling mounting these superb sounding speaker products are suggested for the following uses:

Classrooms, Places of worship, Gymnasiums, Changing rooms, Restaurants, Bars, Beer Gardens, Swimming pools, Outdoor dining plus many more indoor or outdoor applications.







FEATURES


- Suitable for indoor and outdoor installations
- Weather IP65 Rated
- Powder coated aluminium grill
- Pan and tilt bracket system
- Wall or ceiling mountable
- High and Low Impedance operation
- Superb sonic performance
- Sold as pairs in white or black



SPECIFICATIONS

MODEL	FLEX 15	FLEX 30	FLEX 50
RATED IP65	Yes	Yes	Yes
IMPEDANCE 100V BYPASS	8 Ω	8 Ω	8 Ω
100V TAPPINGS WATTS	15, 7.5, 3.75, 1.87	30, 15, 7.5, 3.75	50, 25, 12.5, 6.25
70V TAPPINGS WATTS	7.5, 3.75, 1.87, 0.93	15, 7.5, 3.75, 1.87	25, 12.5, 6.25, 3.12
MAX POWER @ 8 \Overline / RMS	30 Watts	40 Watts	50 Watts
SENSITIVITY 1W/1M	88 dB	89 dB	90 dB
CALCULATED SPL RMS	100dB	105dB	107dB
CALCULATED SPL PEAK	106dB	111dB	113dB
DISPERSION -6 dB POINTS H x V	60° x 60°	60° x 90°	60° x 90°
FREQUENCY RESPONSE	100-20KHz	80-20KHz	50-20KHz
SPEAKER DRIVERS	4 Inch woofer 1 Inch tweeter	5 ¼ Inch woofer 1 Inch tweeter	6 ½ woofer 1 Inch tweeter
PRODUCT DIMENSIONS W x D x H	123 x 121 x 196 mm	159 x 152 x 252 mm	191 x 182 x 304 mm
SHIPPING DIMENSIONS W x D x H	330 x 154 x 217 mm	420 x 195 x 275 mm	502 x 233 x 329 mm
SHIPPING WEIGHT	4.0 Kg	5.5 Kg	7.3 Kg

TYPICAL FREQUENCY RESPONSE

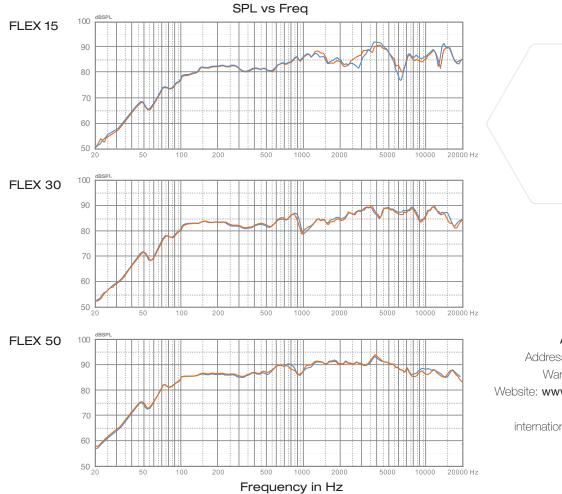

ENGINEERED BY AUSTRALIAN MONITOR

Address: Unit 1, 2 Daydream Street, Warriewood NSW 2102 Australia Website: **www.australianmonitor.com.au** International enquiries email: international@australianmonitor.com.au ABN 86 003 231 187

Version 2.0: November 2021