

WP4R-EU WALL PANEL

WP4R-EU-W • WP4R-EU-B

The Australian Monitor WP4R-EU is a programmable wall panel featuring four buttons and a rotary volume control, designed in a European/UK standard form factor.

Each button provides a momentary contact switch with an integrated status LED, while the volume control includes four LED indicators to display the current level and a push-button for quick audio mute and unmute control.


When connected to compatible Australian Monitor products equipped with accessory ports, the WP4R-EU can be programmed to manage audio sources, adjust levels, trigger tones, play back messages, and activate a wide range of system functions.




FEATURES


- 4 momentary push buttons
- Rotary volume control with push-to-mute
- Integrated green/red status LEDs
- Volume level indicator
- 12-24V DC operation
- RS485 communication port

WP4R-EU-W

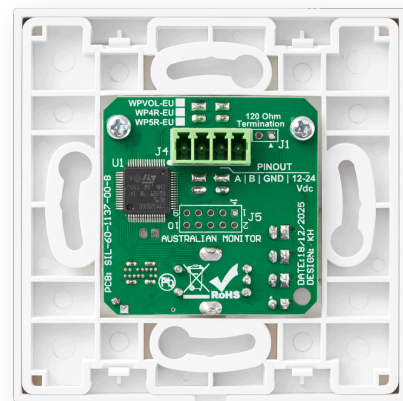

WP4R-EU-B

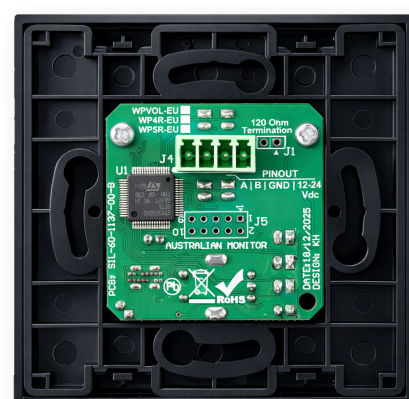


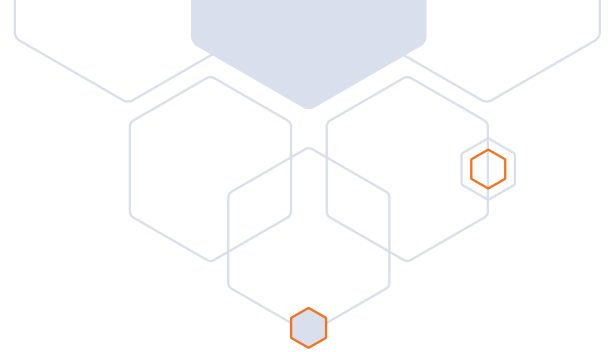

MODEL	WP4R-EU	COMMENTS
GENERAL		
USER CONTROLS	Momentary push buttons, Rotary Volume Control	
INPUT CONNECTORS	3.81mm 4way Euroblock (A, B, GND, 12-24V DC)	
PROGRAMMING INTERFACE	USB-C	PC Control Software
POWER REQUIREMENTS		
INPUT VOLTAGE	+12 to +24V DC	
INPUT CURRENT	12V = 23mA (All red LEDs On) 24V = 13mA (All red LEDs On)	
POWER CONSUMPTION	0.32W Max	
THERMAL DISSIPATION CONSUMPTION	1.06 BTU	1W = 3.412 BTU/Hr
MECHANICAL		
PRODUCT DIMENSIONS	86mm x 45mm x 86mm (3.4"W x 1.8"D x 3.4"H)	
SHIPPING DIMENSIONS	156 x 132 x 101mm (6.1"W x 5.2"D x 4"H)	
NET WEIGHT	75g (0.17Lbs)	
SHIPPING WEIGHT	0.2kg (0.5Lbs)	
FINISH	ABS Plastic	
COLOUR	White or Black	RAL 9010 / RAL 9005
OPERATING TEMPERATURE	0°C to 40°C (95% RH)	
APPROVALS		
	CE, IEC, RCM	



LINE DRAWINGS

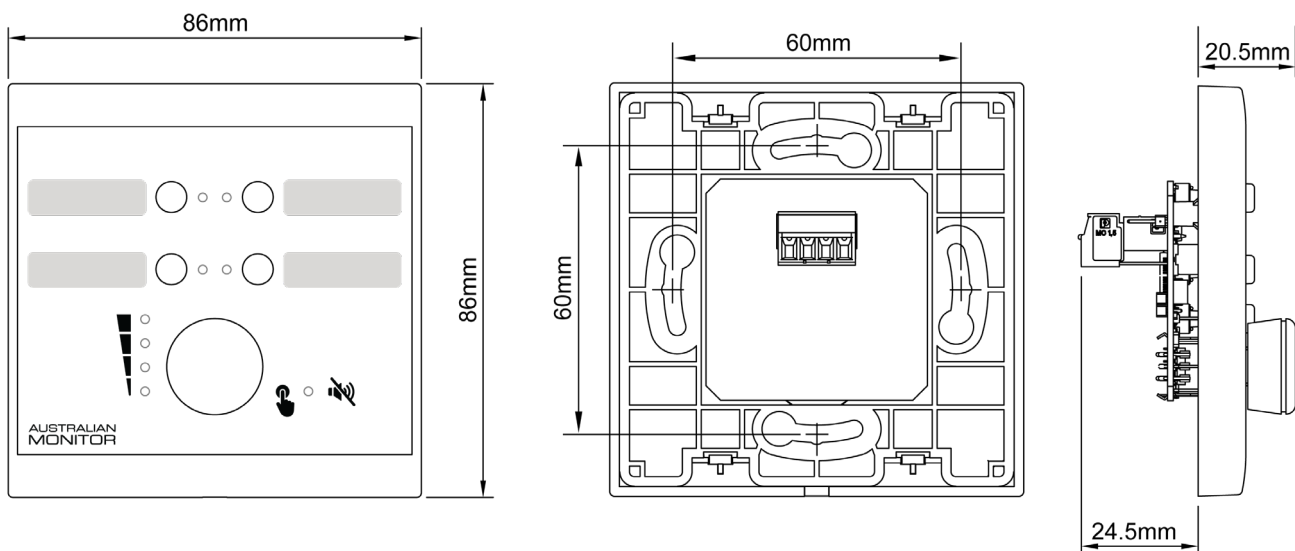

ENGINEERED BY AUSTRALIAN MONITOR

Address: Unit 1, 2 Daydream Street, Warriewood NSW 2102 Australia

Website: www.australianmonitor.com.au

International enquiries email: international@australianmonitor.com.au

ABN 86 003 231 187