

# PICOBLU-V2 FOR RETAIL & HOSPITALITY



**AMX526 - PAGING MICROPHONE**  
AMX526 paging microphone connected to input 1



Ch 3 controls Bluetooth input and rear CH3 RCA input

Ch 2 controls 3.5mm input and rear CH2 RCA input



**BGM VIA BLUETOOTH OR 3.5MM JACK INPUT**  
Programmable Bluetooth 5.1 including, name/PIN & security settings.  
**OR**  
3.5mm jack input. Combines with input 2 on front & rear panels.




Programmable Bluetooth 5.1 via USB C connection

## EXTRA FEATURES ON THE PICOBLUV2 MIXER AMPLIFIERS

- Line output for connection to an additional power amplifier
- Contact closure that gives priority to the mic 1 input
- 2 other line level inputs for additional background sources

**LOW IMPEDANCE**  
2 x FLEX15 or FLEX30 connected to 4Ω output

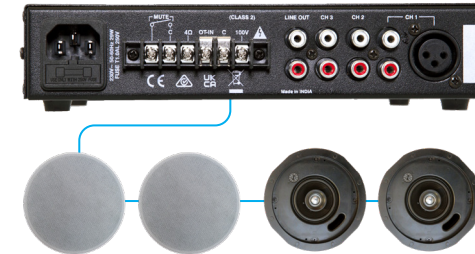

**LOW IMPEDANCE**  
4 x QF20CS connected to 4Ω output  
NB Use loop-thru connectors on speaker and adjust front dial to 16Ω

**HIGH IMPEDANCE**  
Up to 6 x FLEX15 or FLEX30 wall mount speakers tapped at 3.75W connected to 100V output

**OR**  
14 x FLEX15's tapped at 1.87W



**HIGH IMPEDANCE**  
Up to 6 x QFC6CS ceiling speakers tapped at 3.75W connected to 100V output  
**OR**  
Up to 10 x QFC6CS tapped at 2.5W