




WPVOL-EU WALL PANEL

WPVOL-EU-W • WPVOL-EU-B

The Australian Monitor WPVOL-EU is a dedicated volume control wall panel designed in a European/UK standard form factor.

A large rotary control provides smooth, intuitive volume adjustment, while four LED indicators display the current level at a glance. Pressing the rotary control activates mute, with a status LED providing clear visual confirmation of mute state.


When connected to compatible Australian Monitor products equipped with accessory ports, the WPVOL-EU can be programmed to adjust volume levels and control mute across a wide range of system configurations.

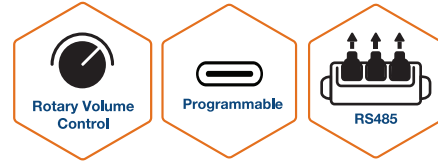


FEATURES


- Rotary volume control with push-to-mute
- 4 LED volume level indicators
- Status LED for mute indication
- RS485 communication port
- USB-C programming interface
- 12-24V DC operation

WPVOL-EU-W

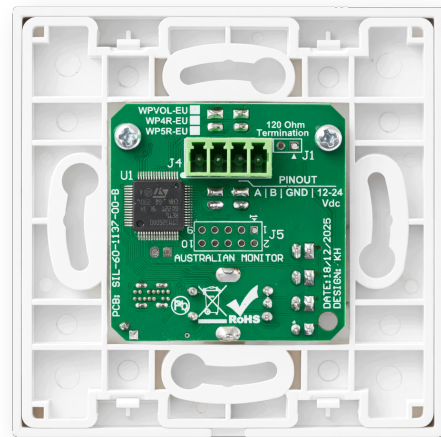

WPVOL-EU-B

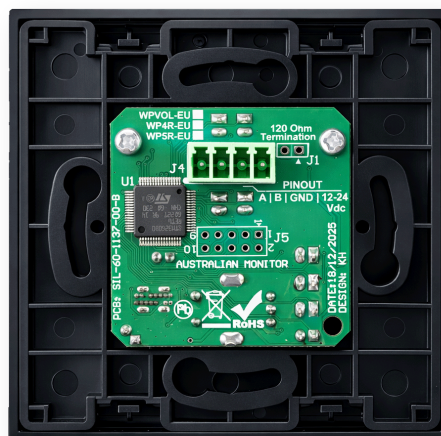


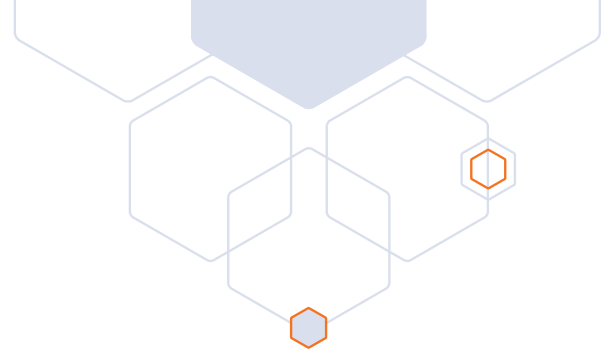

MODEL	WPVOL-EU	COMMENTS
GENERAL		
USER CONTROLS	Rotary Volume Control	
INPUT CONNECTORS	3.81mm 4way Euroblock (A, B, GND, 12-24V DC)	
PROGRAMMING INTERFACE	USB-C	PC Control Software
POWER REQUIREMENTS		
INPUT VOLTAGE	+12 to +24V DC	
INPUT CURRENT	12V = 16mA (All red LEDs On) 24V = 9mA (All red LEDs On)	
POWER CONSUMPTION	0.22W Max	
THERMAL DISSIPATION CONSUMPTION	0.75 BTU	1W = 3.412 BTU/Hr
MECHANICAL		
PRODUCT DIMENSIONS	86mm x 45mm x 86mm (3.4"W x 1.8"D x 3.4"H)	
SHIPPING DIMENSIONS	156 x 132 x 101mm (6.1"W x 5.2"D x 4"H)	
NET WEIGHT	70g (0.15Lbs)	
SHIPPING WEIGHT	0.2kg (0.5Lbs)	
FINISH	ABS Plastic	
COLOUR	White or Black	RAL 9010 / RAL 9005
OPERATING TEMPERATURE	0°C to 40°C (95% RH)	
APPROVALS		
	CE, IEC, RCM	



LINE DRAWINGS

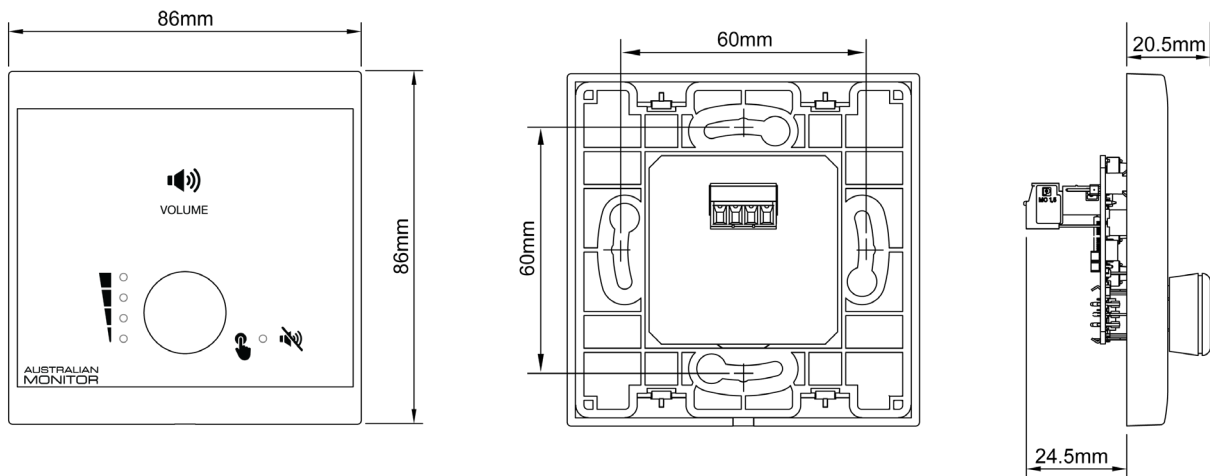

ENGINEERED BY AUSTRALIAN MONITOR

Address: Unit 1, 2 Daydream Street, Warriewood NSW 2102 Australia

Website: www.australianmonitor.com.au

International enquiries email: international@australianmonitor.com.au

ABN 86 003 231 187